



## FEATURES




- 13.3" TFT LED Multi Touch PCAP
- Intel Celeron Quad Core J1900 2.0GHz
- 1x DDR3L 1333MHz 4GB Max up to 8GB
- 2xLAN, 2xRS232/422/485, 8KV Static Electricity & 600W TVS Surge Protection
- Built in TPM2.0 for Hardware-based Security
- Wide voltage DC 9V~36V, with overcurrent, overvoltage and reverse connection protection
- 20°C ~ 70°C extended operating temperature
- IP66 Compliant Front Panel

## SPECIFICATIONS

System		Touch screen	
CPU	Intel Celeron Quad Core J1900 2.0GHz	Touch Screen Type	Multi-Touch PCAP
L2 Cache	2MB	Transmittance	>90%
Chipsets	Intel Bay Trail SOC	Response Time	<5ms
Memory	DDR3L 1333MHz 4GB, Up to 8GB	Surface Hardness	≥7H
Harddisk	1 x mSATA 64G SSD / (128G / 250G / 500G SSD) optional	Supply Voltage	5.0V DC
Graphics	Intel HD Graphics	Touch Life	≥ 3000W
Network	Intel® I211-AT GbE LAN	Instituional	
Audio	Realtek ACL662 Audio controller	Material	High-strength Al-alloy, support IP66
TPM	TPM 2.0	Color	Gray
Operation System	Windows7 / 8 / 10, Linux, Unix, QNX	VESA Mounting	VESA: 100 x 100 mm
I / O		Waterproof Rate	IP65 / IP66
HDMI	1 x H-DMI	Product Dimension	344.50 x 216 x 60 mm
LAN	2 x LAN	Cut-out Size	331 x 203 mm
USB	3 x USB2.0 / 1 x USB3.0	Packing Size	450 x 170 x 350 mm
COM	2 x RS-232 / 422 / 485	Gross Weight	5.0 KG
Wireless Network	4G / WiFi / Bluetooth ( Optional )	Power and Environment	
Other I/O Interface	1 x Power Switch	Operating Temperature	-20~70°C
LCD Panel		Storage Temperature	-20~80°C(-22~176°F)
Panel Size	13.3" Led	Relative Humidity	5%~95%@40°C, non-condensing
Resolution	1920 x 1080	Vibration Range	5-500 Hz, 0.026 G2/Hz, 2.16 Grms, X, Y, Z, 1 hour per axis
Aspect Ratio	16:9		
Display Brightness	400 cd/m2	External Power Supply	AC 100 - 240V~50/60Hz, 1.5A
Contrast Ratio	900:1	Working Voltage	DC IN 9V~36V
Viewing Angle	85 / 85 / 85 / 85 (CR≥10) ( L / R / U / D )	Power Consumption	≤30W



## Dimension & I/O

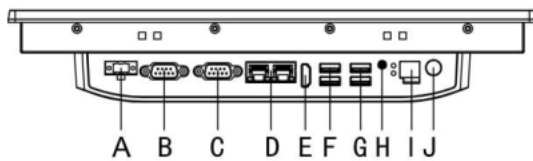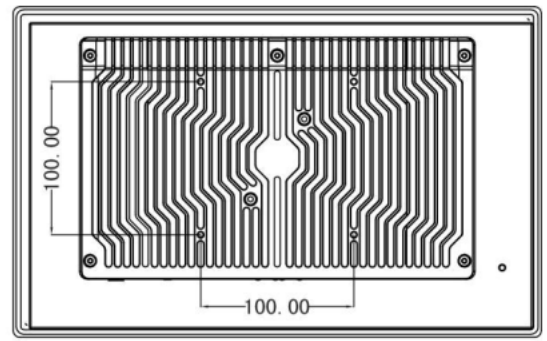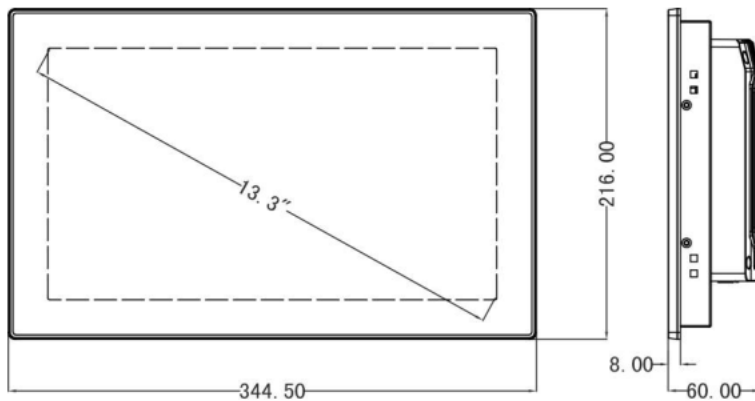

### I / O Definition:

- |                            |                              |
|----------------------------|------------------------------|
| A. DC 9V~36V               | B. COM1:RS-232 / 422 / 485   |
| C. COM2:RS-232 / 422 / 485 | D. 2 x LAN                   |
| E. H-DMI                   | F. 1 x USB 3.0 / 1 x USB 2.0 |
| G. 2 x USB 3.0             | H. Audio                     |
| I. Extension Switch        | J. Power Button              |

Panel Cutout Dimensions: 331 x 203 mm (13.03 x 7.95 in)

## ORDERING INFORMATION

### PACKING LIST

- 1x AS13.3-J1900-LC1
- 1x Utility DVD Driver
- 8x Embedded Buckles
- 1x Power Adaptor

## AVAILABLE MODELS

Display Size	Resolution	Format	Brightness(cd/m <sup>2</sup> )	Viewing Angle	LCD Color	Backlight MTBF
10.1"	1280 x 800	16:10	400 cd/m <sup>2</sup>	85/85/85/85	262K/16.2M	30000 Hr (min.)
10.4"	800x600/1024x768	4:3	350 cd/m <sup>2</sup>	80/80/65/75	262K/16.2M	30000 Hr (min.)
12.1"	800x600/1024x768	4:3	400 cd/m <sup>2</sup>	80/80/65/75	262K/16.7M	30000 Hr (min.)
12.1"	1280x800	16:10	600 cd/m <sup>2</sup>	88/88/88/88	262K/16.7M	50000 Hr (min.)
13.3"	1920x1080	16:9	400cd/m <sup>2</sup>	85/85/85/85	262K/16.7M	50000 Hr (min.)
15"	1024x768	4:3	350cd/m <sup>2</sup>	89/89/89/89	262K/16.2M	50000 Hr (min.)
15 6"	1920x1080	16:9	600cd/m <sup>2</sup>	89/89/89/89	262K/16 2M	50000 Hr (min )
17"	1280x1024	5:4	400cd/m <sup>2</sup>	80/80/70/70	262K/16 7M	50000 Hr (min )
17.3"	1920x1080	16:9	400cd/m <sup>2</sup>	80/80/60/80	262K/16 7M	50000 Hr (min )
19"	1280x1024	5:4	450cd/m <sup>2</sup>	85/85/80/80	262K/16 7M	50000 Hr (min )
21.5"	1920x1080	16:9	400d/m <sup>2</sup>	89/89/89/89	262K/16 7M	50000 Hr (min )
24"	1920x1080	16:9	350cd/m <sup>2</sup>	89/89/89/89	262K/16 7M	50000 Hr (min )

